


8-way tap TLT-8-17+//

Features:

- Cenelec Class A screening effectiveness
- IngressSafe® and ModemSafe® secured
- High port-port isolation performance
- Horizontal in- and output connections while the tap ports are top sided
- F-inner spring accepts 0.56-1.30 mm test gauges
- Robust zinc die-cast housing with NiSn plating
- Tongue and groove epoxy sealed back cover

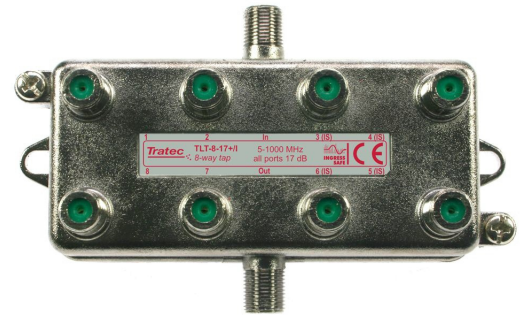

Description

The TLT-series have been specially developed to meet the needs of the Cable Operator. It is a complete series of 2-, 4-, 8- and 16-way models with cascading horizontal input and output connections while the ports are aligned along the top. Some models are available in a terminated variety which have no output port and therefore have a lower loss. The TLT housing is robust and features an easy-to-install design with an epoxy sealed tongue and groove back cover. The plating on the zinc die-cast housing is either nickel or nickel-tin (NiSn) depending on the TLT model. Extensive worldwide research has shown that NiSn is the best plating material for products used in the CATV networks. The most important feature is the prevention against Common Path Distortion (CPD).

The material of the F-connector inner spring is phosphor bronze or beryllium copper with tin or silver plating - dependant on the housing plating (zinc/tin, NiSn/silver plating). The F-connector inner spring has been designed specially for connecting coaxial cables with an inner conductor of 0.56 to 1.30 mm, even when varying thicknesses are connected in succession. The TLT-xx-xx+ series have, compared to the basic series, an improved port loss and isolation performance combined with an NiSn plating. ModemSafe® technology is found in all the TLT ranges, and in addition, the TLT-xx-xx+// series features IngressSafe® circuitry. The high frequency shielding exceeds Class A requirements (CENELEC EN-50083-2:1998) over the whole frequency range.

Specifications

V1 jun 11, 2007

| | Port | Range | Min | Typical | Max | Units | Remark | Margin |
|--------------------|-------------|-------|-----|---------------|-----|-------|--------|--------|
| Frequency Range | - | | 5 | | 862 | MHz | | |
| Equipment Approval | | | | CE | | | | |
| Housing | | | | NiSn plating | | | | |
| Material | F-spring | | | Silver plated | | | | |
| Backcover | Sealed with | | | Epoxy | | | | |
| Insert | | | | Green | | | | |
| Modem Safe circuit | | | | all ports | | | | |
| Screws | Earth | | | NiSn plated | | | | |
| Ingress Safe | Mounting | | | NiSn plated | | | | |
| | Tap | | | 3,4,5,6 | | | | |

Ordering Information

| | | | |
|-------------|-----------|-----------------|----------|
| TLT-8-17+// | 8-way tap | Article number: | 10930610 |
|-------------|-----------|-----------------|----------|

Ingress Safe



An exciting new technology is called Ingress Safe®.

The use of this technology in CATV products is unique. Thanks to the phase cancellation phenomenon, the ingress levels in the CATV network can be drastically reduced. Our unique and Patented Ingress Safe® technology is an effective method to reduce subscriber ingress significantly. As there is a correlation between the frequency and phase of ingress signals with a common origin from two adjacent subscribers, we can use this phenomenon to reduce ingress near to the source.

In traditional products phase related ingress equals approximately $13\text{Log}(n)$ to $17\text{Log}(n)$ dB where n is the number of ports. This means the addition of ingress reduces the carrier to noise ratio between 3.9 dB to 5.1 dB in a 2-way splitter.

A 180° phase shifting device is added to the output of the device. The effect is that the ingress from one subscriber is added in the device 180° out of phase with the ingress from a second subscriber, thereby cancelling each other out. Field tests show that Ingress Safe® units in the distribution network can improve the carrier to noise ratio from 3 dB up to 8 dB.

Each Ingress Safe® model is fitted with integrated ingress reduction

Modem Safe



Modem Safe® is a highly effective surge protection solution. It blocks high level surge pulses and unwanted DC voltages, thus protecting sensitive equipment. In addition to the protection against these surges and voltages, ModemSafe technology® also prevents the internal ferrites becoming magnetized. When ferrite material is magnetized, the intermodulation behaviour deteriorates resulting in an increase of passive intermodulation products. Thanks to the ModemSafe® circuitry, the intermodulation behaviour of the models is excellent and will not deteriorate over time.

Specifications

V1 jun 11, 2007

| | Port | Range | Min | Typical | Max | Units | Remark | Margin |
|-------------------------|-------------------|------------------------|-----|---------|------|-------|--------|--------|
| Insertion Loss | In -> Out | 5 MHz < F < 15 MHz | | 2.3 | 2.6 | dB | | |
| | | 15 MHz < F < 40 MHz | | 2 | 2.5 | dB | | |
| | | 40 MHz < F < 550 MHz | | 2.2 | 2.8 | dB | | |
| | | 550 MHz < F < 862 MHz | | 2.8 | 3.5 | dB | | |
| Tap Loss | In -> Tap 1,2,7,8 | 862 MHz < F < 1000 MHz | | 3.8 | 4.5 | dB | | |
| | | 5 MHz < F < 40 MHz | | 16 | 16.5 | dB | | |
| | | 40 MHz < F < 550 MHz | | 16.2 | 16.7 | dB | | |
| | | 550 MHz < F < 862 MHz | | 16.5 | 18 | dB | | |
| | In -> Tap 3,4,5,6 | 862 MHz < F < 1000 MHz | | 18.5 | 19 | dB | | |
| | | 5 MHz < F < 40 MHz | | 16.5 | 17 | dB | | |
| | | 40 MHz < F < 550 MHz | | 16.7 | 17.2 | dB | | |
| | | 550 MHz < F < 862 MHz | | 17 | 18.5 | dB | | |
| Return Loss | In/Out/Tap | 862 MHz < F < 1000 MHz | | 19 | 19.5 | dB | | |
| | | 5 MHz < F < 40 MHz | 22 | | | dB | | |
| | | 40 MHz < F < 862 MHz | 22 | | | dB | 2 | |
| | | 862 MHz < F < 1000 MHz | 14 | | | dB | 2 | |
| Isolation | Out -> Tap | 5 MHz < F < 40 MHz | 30 | | | dB | | |
| | | 40 MHz < F < 550 MHz | 29 | | | dB | | |
| | | 550 MHz < F < 862 MHz | 26 | | | dB | | |
| | | 862 MHz < F < 1000 MHz | 26 | | | dB | | |
| | Tap -> Tap | 5 MHz < F < 470 MHz | 30 | | | dB | | |
| | | 470 MHz < F < 862 MHz | 25 | | | dB | | |
| | | 862 MHz < F < 1000 MHz | 20 | | | dB | | |
| | | 5 MHz < F < 300 MHz | 85 | 95 | | dB | 1 | |
| Screening Effectiveness | - | 300 MHz < F < 470 MHz | 80 | 90 | | dB | 1 | |
| | | 470 MHz < F < 862 MHz | 75 | 85 | | dB | 1 | |

| Remarks | |
|---------|---|
| 1 | Transfer Impedance Method according IEC 60728-2(5-30 MHz) Absorbion clamp method according IEC-60728-2 § 4.4 (30-1000 MHz) |
| 2 | F > 40 MHz -1.5 dB/oct |
| note: | Specifications are measured at room temperature |